

# Adjustable Sarg | 3470201724



## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 1.5W      |
| Length         | 400 mm    |
| Length of wire | 170 cm    |
| Packing method | Sales box |

## Lighting

|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~110 lumen    |



## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials

|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

Dimensions [mm]

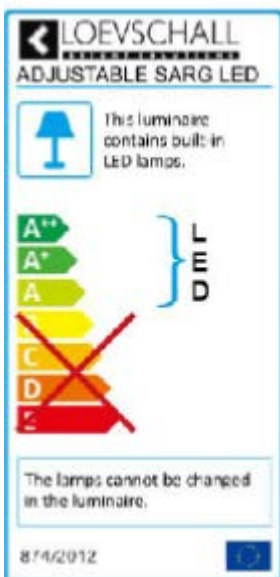



### Packing

| Box   | Weight                          | Size          | Amount |
|-------|---------------------------------|---------------|--------|
| Inner |                                 | 360x60x40mm   | 1 pc   |
| Outer | G.W.: 11.2 KGS<br>N.W.: 8.2 KGS | 370x330x455mm | 50 pcs |

### Labels

| No. | Placement       | Size     | Colour | Print | Amount |
|-----|-----------------|----------|--------|-------|--------|
| 1   | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2   | Back of profile | 20x10 mm | Silver | Black | 1 pc   |

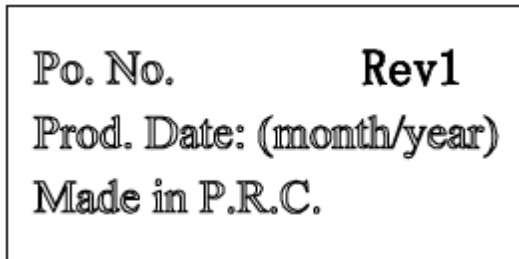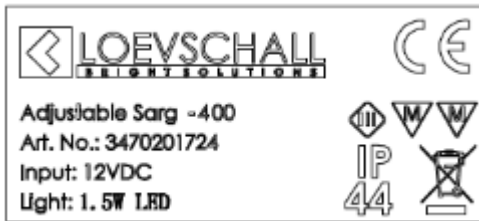


### Accessories

| Type | Info | Amount |
|------|------|--------|
| NA   | NA   | NA     |

### Product history

Revise and date  
 Rev0 – 05-01-2016; First version of datasheet

# Adjustable Sarg | 3470201740

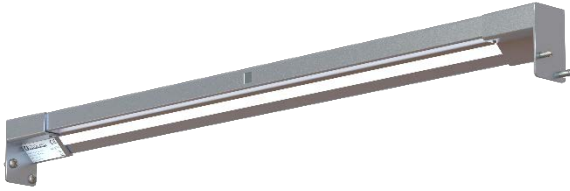

## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 3W        |
| Length         | 600 mm    |
| Length of wire | 180 cm    |
| Packing method | Sales box |

## Lighting

|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~205 lumen    |



## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials


|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

Dimensions [mm]

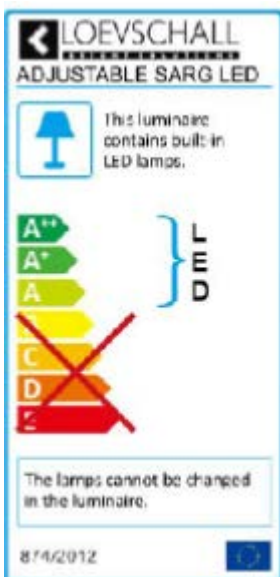

| Packing |                                  |               |        |
|---------|----------------------------------|---------------|--------|
| Box     | Weight                           | Size          | Amount |
| Inner   |                                  | 560x60x40mm   | 1 pc   |
| Outer   | G.W.: 15.4 KGS<br>N.W.: 10.9 KGS | 570x330x455mm | 50 pcs |

| Labels |                 |          |        |       |        |
|--------|-----------------|----------|--------|-------|--------|
| No.    | Placement       | Size     | Colour | Print | Amount |
| 1      | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2      | Back of profile | 20x10 mm | Silver | Black | 1 pc   |

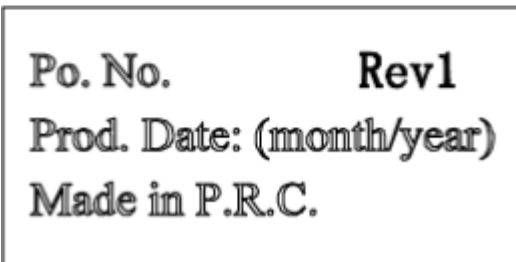

| Accessories |      |        |
|-------------|------|--------|
| Type        | Info | Amount |
| NA          | NA   | NA     |

| Product history                               |
|---|
| Revise and date                               |
| Rev0 – 05-01-2016; First version of datasheet |

# Adjustable Sarg | 3470201753



## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 3W        |
| Length         | 800 mm    |
| Length of wire | 190 cm    |
| Packing method | Sales box |

## Lighting

|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~205 lumen    |



## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials

|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

Dimensions [mm]

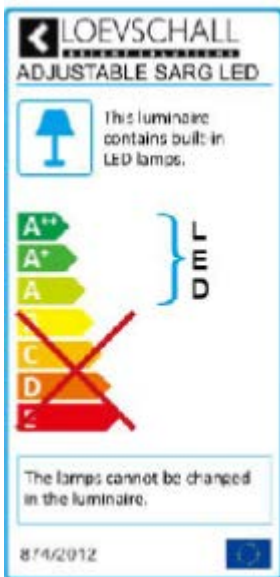



### Packing

| Box   | Weight                           | Size          | Amount |
|-------|----------------------------------|---------------|--------|
| Inner |                                  | 760x60x40mm   | 1 pc   |
| Outer | G.W.: 19.4 KGS<br>N.W.: 13.4 KGS | 770x330x455mm | 50 pcs |

### Labels

| No. | Placement       | Size     | Colour | Print | Amount |
|-----|-----------------|----------|--------|-------|--------|
| 1   | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2   | Back of profile | 20x10 mm | Silver | Black | 1 pc   |

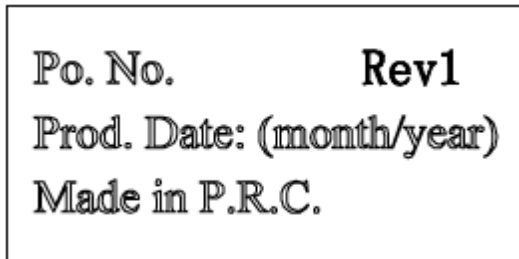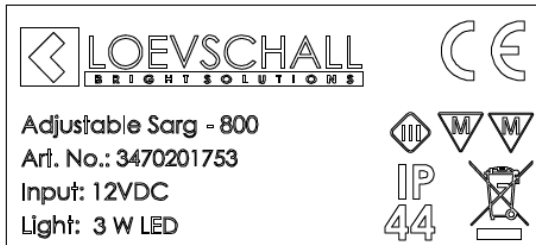

### Accessories

| Type | Info | Amount |
|------|------|--------|
| NA   | NA   | NA     |


### Product history

Revise and date  
 Rev0 – 05-01-2016; First version of datasheet

# Adjustable Sarg | 3470201766



Dimensions [mm]



## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 4.5W      |
| Length         | 900 mm    |
| Length of wire | 195 cm    |
| Packing method | Sales box |

## Lighting


|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~298 lumen    |

## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials

|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

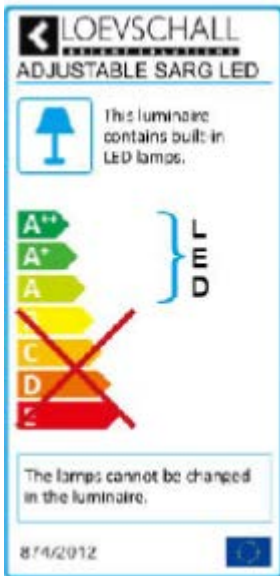

**Packing**

| Box   | Weight                           | Size          | Amount |
|-------|----------------------------------|---------------|--------|
| Inner |                                  | 860x60x40mm   | 1 pc   |
| Outer | G.W.: 17.5 KGS<br>N.W.: 12.1 KGS | 870x330x455mm | 50 pcs |

**Labels**

| No. | Placement       | Size     | Colour | Print | Amount |
|-----|-----------------|----------|--------|-------|--------|
| 1   | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2   | Back of profile | 20x10 mm | Silver | Black | 1 pc   |



Po. No. **Rev1**  
 Prod. Date: (month/year)  
 Made in P.R.C.

**Accessories**

| Type | Info | Amount |
|------|------|--------|
| NA   | NA   | NA     |

**Product history**


Revise and date  
 Rev0 – 05-01-2016; First version of datasheet



# Adjustable Sarg | 3470201779



Dimensions [mm]



## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 4.5W      |
| Length         | 1000 mm   |
| Length of wire | 200 cm    |
| Packing method | Sales box |

## Lighting


|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~298 lumen    |

## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials

|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

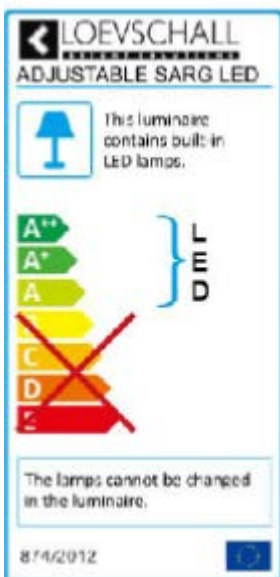


**Packing**

| Box   | Weight                           | Size          | Amount |
|-------|----------------------------------|---------------|--------|
| Inner |                                  | 960x60x40mm   | 1 pc   |
| Outer | G.W.: 19.2 KGS<br>N.W.: 13.3 KGS | 970x330x455mm | 50 pcs |

**Labels**

| No. | Placement       | Size     | Colour | Print | Amount |
|-----|-----------------|----------|--------|-------|--------|
| 1   | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2   | Back of profile | 20x10 mm | Silver | Black | 1 pc   |

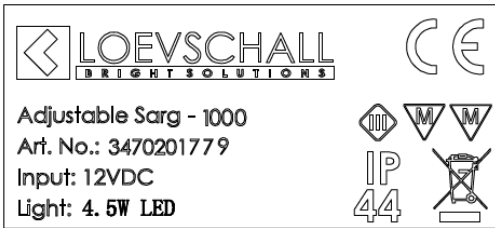

Po. No.                      **Rev1**  
 Prod. Date: (month/year)  
 Made in P.R.C.

**Accessories**

| Type | Info | Amount |
|------|------|--------|
| NA   | NA   | NA     |


**Product history**

Revise and date  
 Rev0 – 05-01-2016; First version of datasheet

# Adjustable Sarg | 3470201782



Dimensions [mm]



## General features

|                |           |
|----------------|-----------|
| Power supply   | 12V (DC)  |
| Light source   | LED       |
| Wattage        | 6W        |
| Length         | 1200 mm   |
| Length of wire | 210 cm    |
| Packing method | Sales box |

## Lighting


|                        |               |
|------------------------|---------------|
| Beam angle             | 120°          |
| Colour temperature     | 3400K +/-135K |
| Colour rendering index | >90           |
| Luminous flux          | ~372 lumen    |

## Safety

|                  |           |
|------------------|-----------|
| IP Class         | IP44      |
| Protection Class | Class III |
| Approvals        | CE        |

## Materials

|         |           |
|---------|-----------|
| Profile | Aluminium |
| Endcap  | Aluminium |

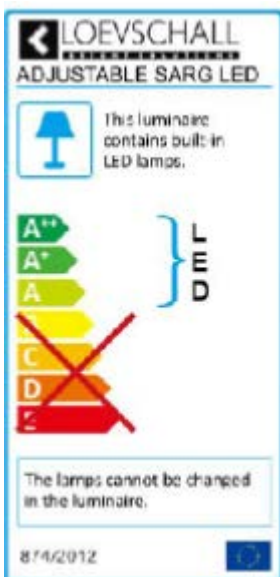

**Packing**

| Box   | Weight                           | Size           | Amount |
|-------|----------------------------------|----------------|--------|
| Inner |                                  | 1160x60x40mm   | 1 pc   |
| Outer | G.W.: 18.6 KGS<br>N.W.: 13.1 KGS | 1170x330x326mm | 35 pcs |

**Labels**

| No. | Placement       | Size     | Colour | Print | Amount |
|-----|-----------------|----------|--------|-------|--------|
| 1   | Left endcap     | 40x18 mm | Silver | Black | 1 pc   |
| 2   | Back of profile | 20x10 mm | Silver | Black | 1 pc   |



Po. No.                      **Rev1**  
 Prod. Date: (month/year)  
 Made in P.R.C.

**Accessories**

| Type | Info | Amount |
|------|------|--------|
| NA   | NA   | NA     |

**Product history**

Revise and date  
 Rev0 – 05-01-2016; First version of datasheet